




Splitboard Dual Climbing Heels w/ Heel Lock



 55mm & 75mm
Wire Heights

- Simple and effective heel locking device with dual height climbing wires.
- Compatible with Speed Rail, Light Rail, and Slider Track.
- Use for short descents in rolling terrain, traversing ridgelines, and sidestepping.

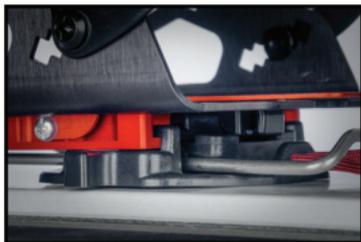

MADE IN
UTAH
USA



voile.com

Installation:



1.) Thread each pull-cord end through the holes on the pull-tab at the rear of the Heel Lock.




2.) With the pull-cord tags equal lengths, tie a simple over-hand knot at the end of the cord.




3.) Remove all hardware from the heel inserts on both board halves. Blow out the inserts to clear them of any debris. Existing screws will be reused.



4.) Position the Guide Washer over the inserts with the flat side facing the board's topsheet. Place the Heel Lock over the Guide Washer with the pull cord pointed towards the tail of your board.

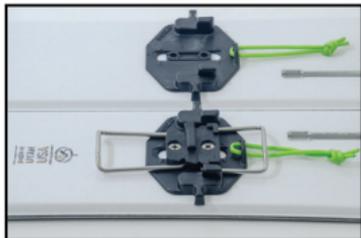

5.) Position your Climbing Block and Climbing Wires over the inserts with the longer 75mm wire facing the board's tip. Fasten screws securely.

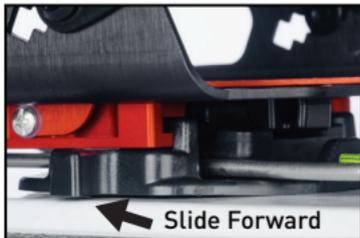

6.) To lock your heel: Lower both climbing wires, rotate your binding down to rest flat against the board, and slide the Heel Lock forward.

MADE IN
UTAH
USA



voile.com